


Masonry to Masonry Wall Ties

These products act to secure two leaves of a cavity wall to each other, allowing them to act as one structurally. A cavity tie usually incorporates some mechanism, (usually a change of shape) to discourage moisture moving across the tie. Most cavity ties are available with a dedicated clip to secure insulation (usually in sheet form) within the cavity.

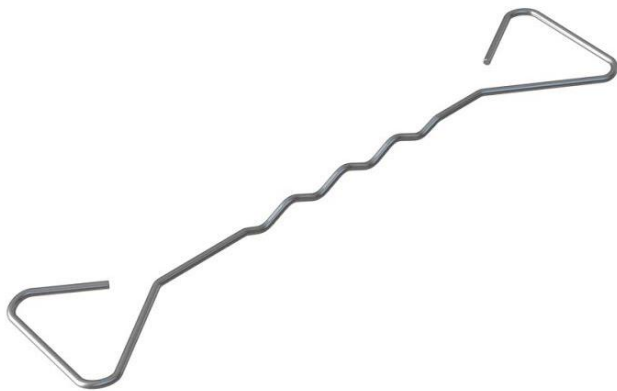

Product

VE2 General Purpose Wall Tie

Multidrip feature to prevent moisture travelling across the cavity. The design means that the tie can be installed either way up.

Tested as Type B (sound)

Tested as Type 2 (strength) to BS EN 845-1.

Size: 275mm

Performance

VE2 275 for up to 150mm Cavity	
Tension Capacity	2200N
Compression Capacity	1410N
Minimum Embedment	62.5mm
Minimum Mortar Joint	10mm

Safety Precautions

VE2 General Purpose Wall Ties are manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.