
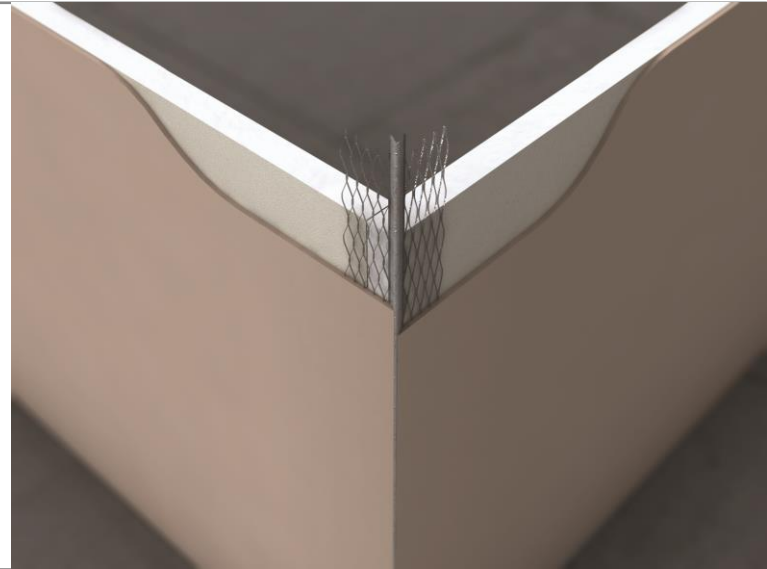


Drylining Beads

These beads provide the plasterer with the ability to produce true straight edges in drylining applications and give an excellent key for thin coat (skim) plastering. The fixing of all these products is simple and the beads give good resistance to cracking, chipping and impact damage on corners and edges.

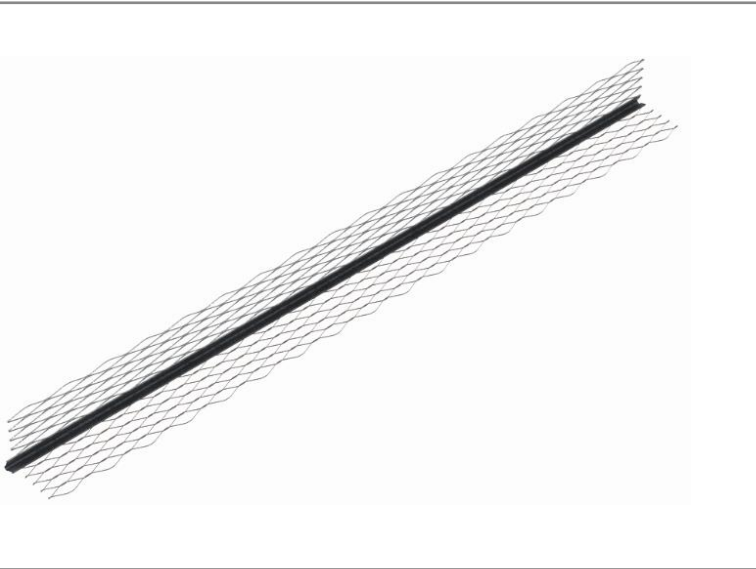

Product

GMM Galvanised Mini Mesh Bead

A thin coat bead with fine mesh wings designed for one coat plastering. Plaster depth 3mm.

Use on plasterboard lined walls or aerated blocks. Fix with nails or plaster dabs.

Manufactured to BS6452 Part 1: 1984
Installation as BS EN 13658-1:2005
Material conforms to BS EN 10327 2005

Internal use only.

Sizes	Per Box:
2.4m x 28mm wing	50 lengths
2.7m x 28mm wing	50 lengths
3.0m x 28mm wing	50 lengths

Safety Precautions

GMM Galvanised Mini Mesh Bead is manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.

Storage & Protection

To prevent distortion and damage the GMM bead should be kept dry and stored above the ground on a flat surface.

Any potential corrosion in galvanised beads will only become apparent during the initial drying out period of the plaster or during periods of dampness and heavy condensation. The drying out period (which should be a maximum of 5-7 days) should be kept to a minimum.

Our GMM should be fixed using galvanised nails or plaster dabs.