


## Channel Systems

These products allow vertical movement whilst offering horizontal restraint. The channel system tends to be face-fixed while the slot is usually cast into concrete. These systems may be used to overcome differences in coursing between masonry leaves.

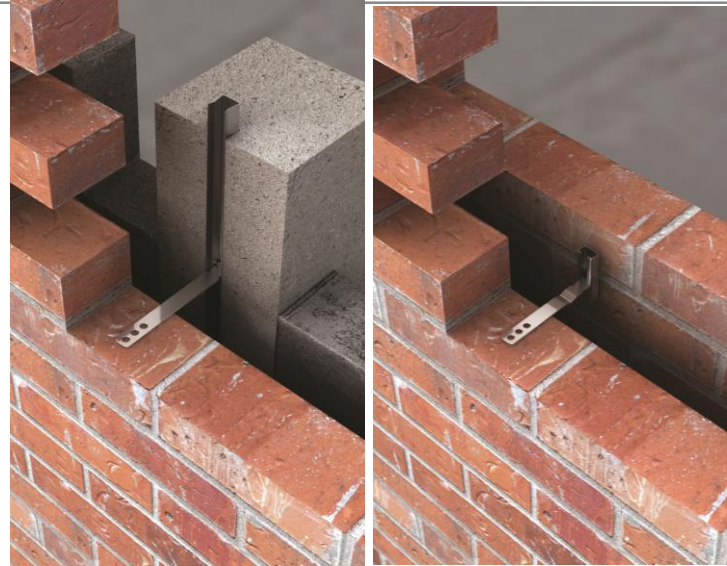

## Product

### VS8D Dovetail Safety Tie with Drip

A universal head enables this tie to be used with all V60 channel systems and V29 slot to restrain brickwork supplied with a drip to prevent the passage of moisture across the cavity. Drip positioned 90mm from safety end as standard.

Sizes:

100mm	200mm
125mm	225mm
150mm	250mm
175mm	

## Performance

VS8D up to 125mm cavity	
Compressive Load Capacity	<b>4896N</b>
Tensile Load Capacity (cast in V29)	<b>2960N</b>
Tensile Load Capacity (surface in 28/15)	<b>5284N</b>
Tensile Load at Mortar End	<b>5636N</b>

VS8D up to 235mm cavity	
Compressive Load Capacity	<b>1470N</b>
Tensile Load Capacity (cast in V29)	<b>2960N</b>
Tensile Load Capacity (surface in 28/15)	<b>5284N</b>
Tensile Load at Mortar End	<b>5636N</b>

### Safety Precautions

VS8D Dovetail Safety Ties with Drip are manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.