
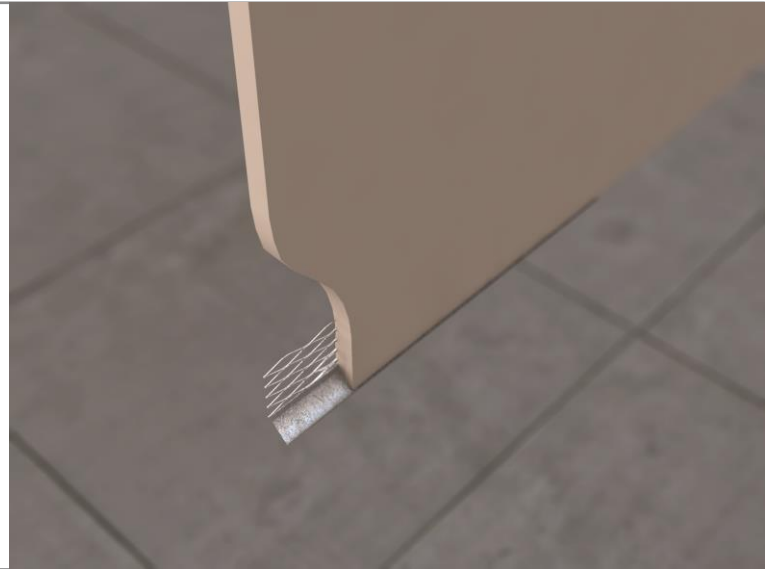


Plaster and Render Beads

These beads are designed to give true corners and edges to plaster and render where thick or 'rough' coats are required. Fixing is easy using plaster dabs or galvanised nails (with galvanised beads) and the mesh wings provide resistance to cracking while offering a good key to the plaster or render.

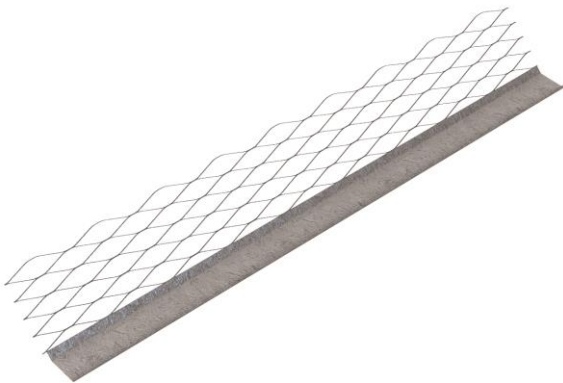

Product

GERS Galvanised External Render Stop (Bell) Bead

Used where a neat drop or 'bell-end' lower edge is needed on external render. Fixed by mortar dabs or masonry nails. Although this is for external use we would generally recommend Stainless Steel or PVC-u for this application only using this product in sheltered or low rainfall areas.

Available in galvanised steel grade DX.51. Z275g to BS EN 10346:2009
Manufactured to BS EN 13658-1: 2005

Storage & Information

To prevent distortion and damage the GERS bead should be kept dry and stored above the ground on a flat surface.

Any potential corrosion in galvanised beads will only become apparent during the initial drying out period of the plaster or during periods of dampness and heavy condensation. The drying out period (which should be a maximum of 5-7 days) should be kept to a minimum.

Sizes	Per Box:
2.4m	50 lengths
3.0m	50 lengths

Safety Precautions

GERS Galvanised External Render Stop Bead is manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.

Head Office: Vista Engineering Ltd, Carr Brook Works, Elnor Lane, Whaley Bridge, High Peak SK23 7JN
Tel: Sales: +44 (0) 1663 736 700 Fax: +44 (0) 1663 736 710

Scotland Office: Vista Engineering Ltd, 79 Dunn Street, Parkhead, Glasgow, G40 3PA
Tel: +44 (0) 141 613 3144 Fax: +44 (0) 141 613 3031

web: www.vistaeng.co.uk email: sales@vistaeng.co.uk