
PMB PVC-u Movement Bead

Plaster and Render Beads

PVC-u beads are now being used more and more, particularly in areas of high rainfall or extreme damp conditions. They provide an economical alternative to Stainless Steel products and are used in the same way as normal galvanised or stainless steel beads. They are fixed using plaster dabs or nails etc and are manufactured from white high density polyvinylchloride high impact window grade material. Other colours are available and manufactured to order. The face of the bead is ribbed and perforated to produce a good plaster or mortar key and can be easily cut to size using a hacksaw.



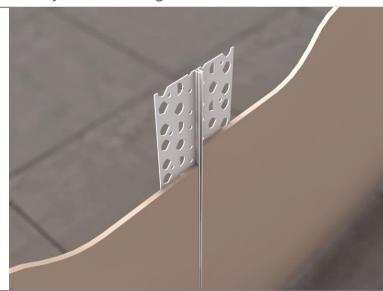

PMB PVC-u Movement Bead

Designed to form a movement joint where needed in a long run of plastered or rendered masonry where there is a movement joint or to allow for thermal or differential movement in a long run of plaster or render.

The bead consists of two plaster stop beads joined with a white extrusion allowing for approximately 4mm of movement when installed vertically.

Internal and external use.

Benefits

- Simple installation (with plaster dabs or stainless steel
- No sharp edges, and safe to handle;
- Easy to cut (by use of tin snips or fine tooth saw);
- Non corrosive

Dimension

Sizes	Per Box:
2.5m x 10/12mm	25 lengths
2.5m x 15/17mm	25 lengths
2.5m x 20/22mm	25 lengths

Head Office: Vista Engineering Ltd, Carr Brook Works, Elnor Lane, Whaley Bridge, High Peak SK23 7JN Tel: Sales: +44 (0) 1663 736 700 Fax: +44 (0) 1663 736 710

d Office: Vista Engineering Ltd, 79 Dunn Steet, Parkhead, Glasgow, G40 3PA Tel: +44 (0) 141 613 3144 Fax: +44 (0) 141 613 3031

