
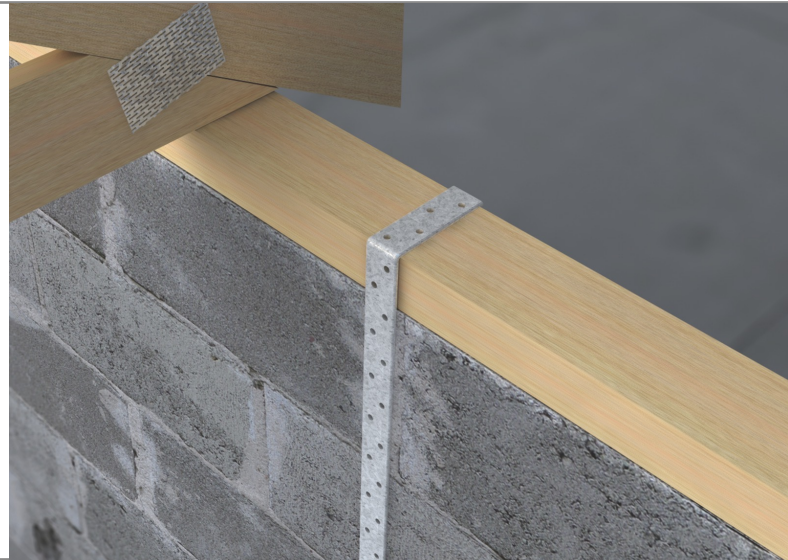


V Light Duty Restraint Straps

Data sheet

Issue Date:
May 2026

The V Vertical restraint straps are a traditional light duty restraint strap used to provide vertical restraint applications such as tying timber roofs and wall plates to the masonry wall. Manufactured from galvanised mild steel to BS EN 10346:2015.

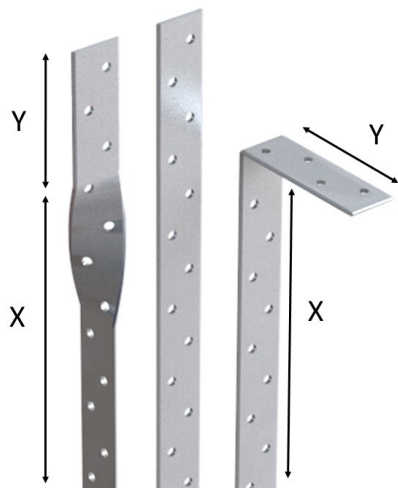

Product

Features:

- Available in various lengths
- Available as Straight, Bent or Twisted

Approvals:

- Meets the requirements of BS EN 845-1
- UKCA and CE Marked

Product Details				
Product code	Dimensions (mm)		Holes no. 6.0 Ø (mm)	Characteristic Capacity (kN)
	T	W		
V	2.3	27	Holes at 25mm staggered centres	4.0

Custom Order				
Please specify the following information when ordering:				
<ul style="list-style-type: none"> • Product code V = Vertical (light duty) • Prefix product code with SS if stainless steel required • Overall girth, and length of bends • Position of twist (twist is approx. 50mm long) 				
e.g. V/1200/B150 = Vertical/ o/a girth/bend 150				
SS/V/1000/T100 = St. Steel / Vertical/ o/a girth/twist 100				
Standard product includes one bend or twist. Additional bends/twists/fishtails charged extra.				
Increments of less than 100mm will be charged at the full rate e.g. 1050mm charged at 1100mm rate.				

Bent Variations				
Product Code	Length (mm) X	Bend (mm) Y	Total Length (mm)	Pack Size
V/400/B100	300	100	400	20
V/600/B100	500	100	600	20
V/900/B100	800	100	900	20
V/1000/B100	900	100	1000	20
V/1200/B100	1100	100	1200	20

Flat Variations		
Product Code	Total Length (mm)	Pack Size
V/200/F	200	20
V/300/F	300	20
V/900/F	900	20
V/1000/F	1000	20

Twist Variations				
Product Code	Length (mm) X	Twist (mm) Y	Total Length (mm)	Pack Size
V/900/T	800	100	900	20
V/900/T150	750	150	900	20
V/1000/T	900	100	1000	20

