


GCJB30 Aluminium Control Joint Bead

Data sheet

Issue Date:
March 2026

Drylining Beads

Drylining beads provide the plasterer with the ability to produce true straight edges in drylining applications and give an excellent key for thin coat (skim) plastering. Fixing of all the products is simple and the beads give good resistance to cracking, chipping and impact damage on corners and edges.

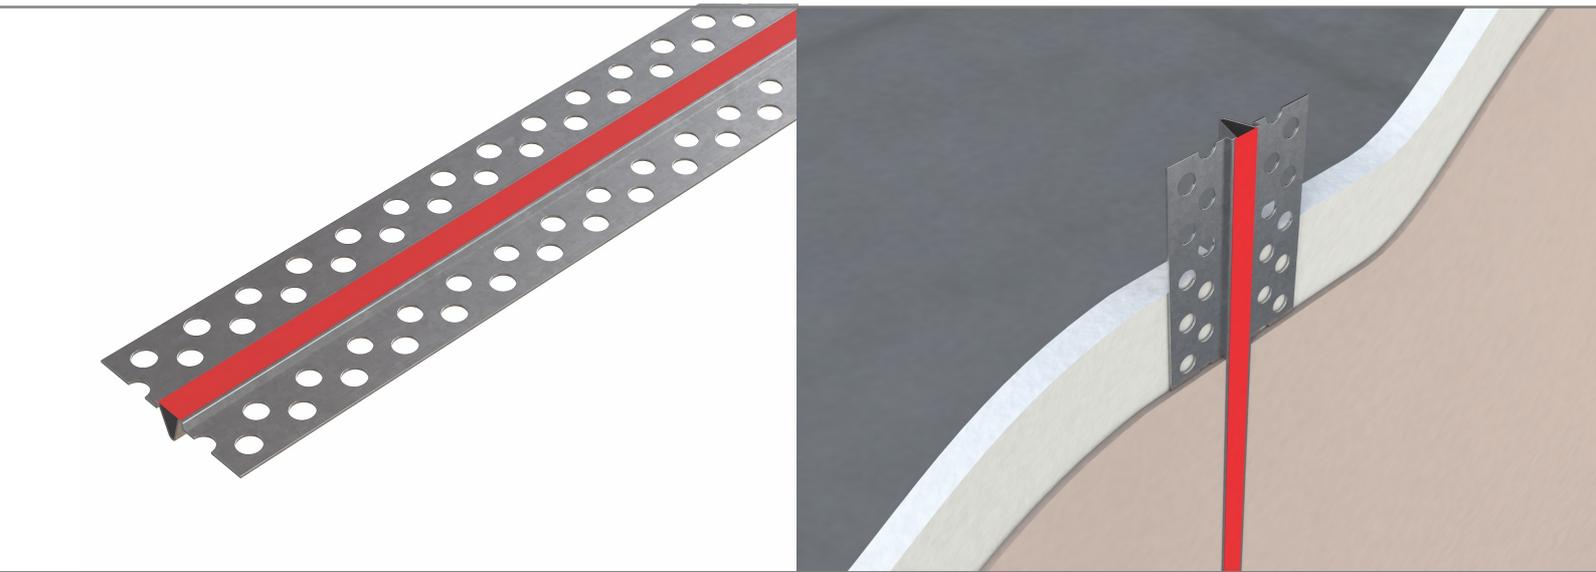

GCJB30 Aluminium Control Joint Bead

An aluminium bead used to control and relieve stress and movement in drywall, preventing damage by accommodating expansion and contraction of up to 7mm. 50mm overall perforated wings enable installation with aluminium nails, plaster dabs or suitable adhesive at maximum 600mm centres.

The bead is supplied with a removable PVC protection tape that is removed after the bead has been plastered in place. The perforated metal wings provide a suitable key to prevent cracking..

Standard:	BS EN14353:2007+A1:2010
Material:	Aluminium 1050H14
Material gauge:	0.45mm
Reaction to fire:	Class A1

Code	Size	Per Box	Weight
GCJB30	3.0m x 50mm wing	10 lengths	3kgs

Goods to be stored and transported laying down and in dry conditions.
Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.