


Plaster and Render Beads

Beads that are designed to give true corners and edges to plaster and render where thick or ‘rough’ coats are required. Fixing is easy using plaster dabs or galvanised nails (with galvanised beads) and the mesh wings provide resistance to cracking while offering a good key to the plaster or render.

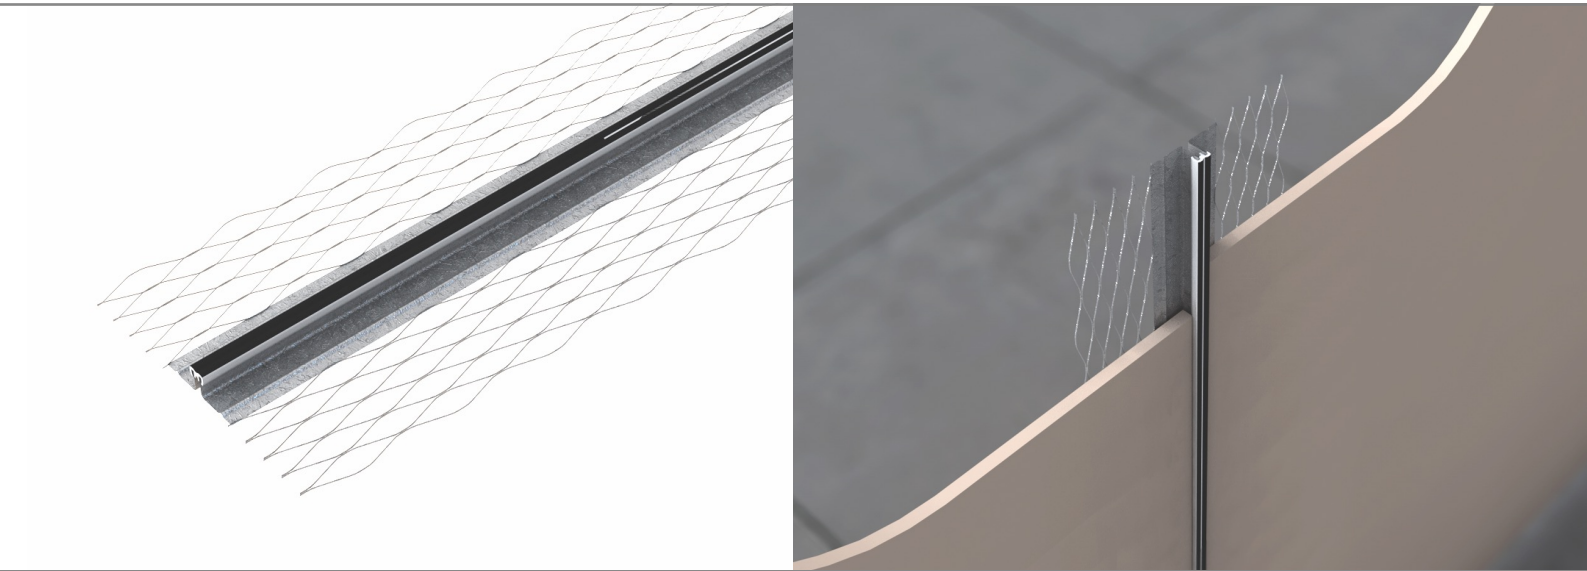

GMB Galvanised Movement Bead

A bead used to form movement joints in plaster where long wall runs either have movement joints in situ or where there is a need to allow for differential or thermal movement. The bead consists of two plaster stop lengths joined by a white pvc extrusion which allows for +3/-1mm of movement and is covered by a vinyl tape which is removed after plastering. The 108mm overall mesh wing allows for a good plaster key and resistance to cracking. Fixed by plaster or mortar dabs, grab adhesive or galvanised nails/screws with washer at maximum 600mm centres. Internal use only. Beads can be cut to size as required using tin-snips and/or a hacksaw. The large diamond of the expanded metal wings provide a suitable key to prevent cracking. Avoid damage to bead and coating when trowelling.

Standard: BS EN13658-1:2005
Material: Galvanised mild steel DX51D+Z275 (275g/m² zinc coating)
Material gauge: 0.4mm
Reaction to fire: Class E

Code	Size	Per Box	Weight
G10MB30	3.0m x 10mm	10 lengths	11kgs
G13MB30	3.0m x 13mm	10 lengths	12kgs
G16MB30	3.0m x 16mm	10 lengths	13kgs
G19MB30	3.0m x 19mm	10 lengths	14kgs

Goods to be stored and transported laying down and in dry conditions.
Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.