


Drylining Beads

Drylining beads provide the plasterer with the ability to produce true straight edges in drylining applications and give an excellent key for thin coat (skim) plastering. Fixing of all the products is simple and the beads give good resistance to cracking, chipping and impact damage on corners and edges.

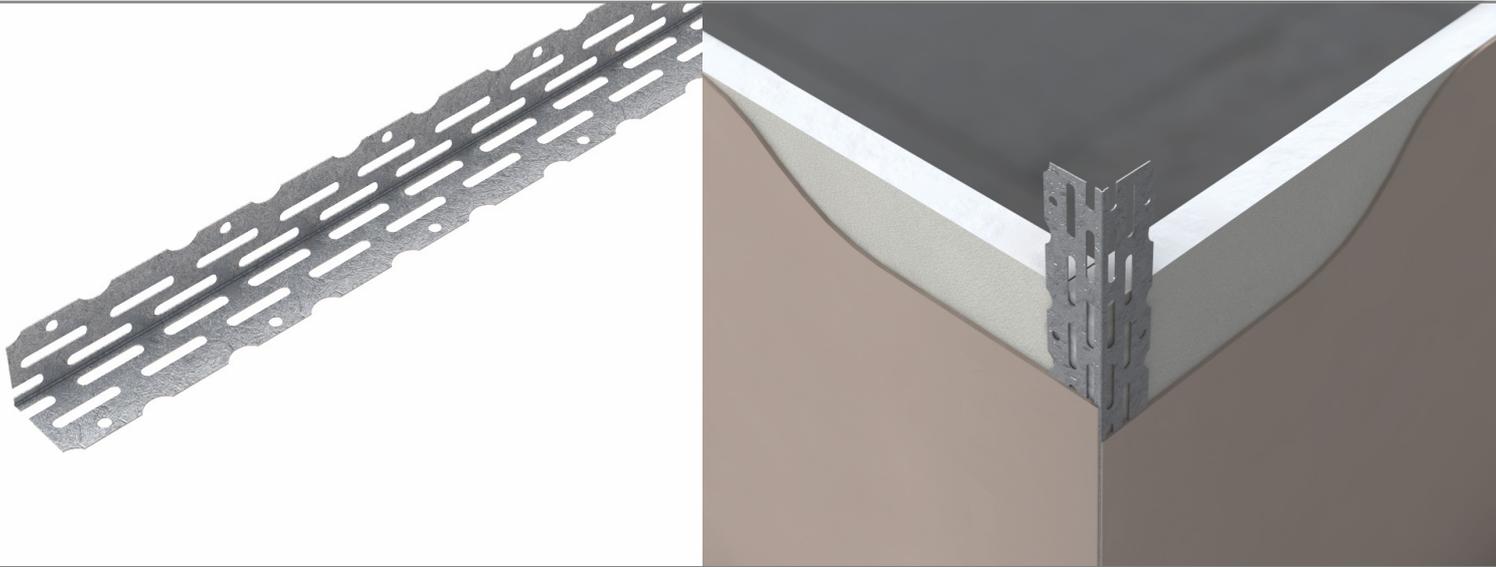

GPTCB Galvanised Perforated Thin Coat Bead

A thin coat board bead for plaster skimming on plasterboard lined walls or overskim of existing plastered walls. Plaster depth 2/3mm. Nail holes for easy fix with drywall nails. The bead can alternatively be installed using a suitable adhesive or plaster dabs at maximum 600mm intervals. Scalloped edge for an excellent plaster key. Internal use only.

Beads can be cut to size as required using tin-snips and/or a hacksaw. The perforated wings provide a suitable key to prevent cracking. Avoid damage to bead and coating when trowelling.

Standard:	BS EN14353:2007+A1:2010
Material:	Galvanised mild steel DX51D+Z275 (275g/m ² Zinc coating)
Material gauge:	0.4mm
Reaction to fire:	Class A1

Code	Size	Per Box	Weight
GPTCB24	2.4m x 22mm wing	50 lengths	14kgs
GPTCB27	2.7m x 22mm wing	50 lengths	15.5kgs
GPTCB30	3.0m x 22mm wing	50 lengths	17kgs

Goods to be stored and transported laying down and in dry conditions.
Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.