


# V60T 28/15 Tanged Back Channel

Data sheet

Issue Date:  
March 2026

## Channel Systems

These products both allow vertical movement whilst offering horizontal restraint. The channel system tends to be face-fixed while the slot is usually cast into concrete. These systems may be used to overcome differences in coursing between masonry leaves.

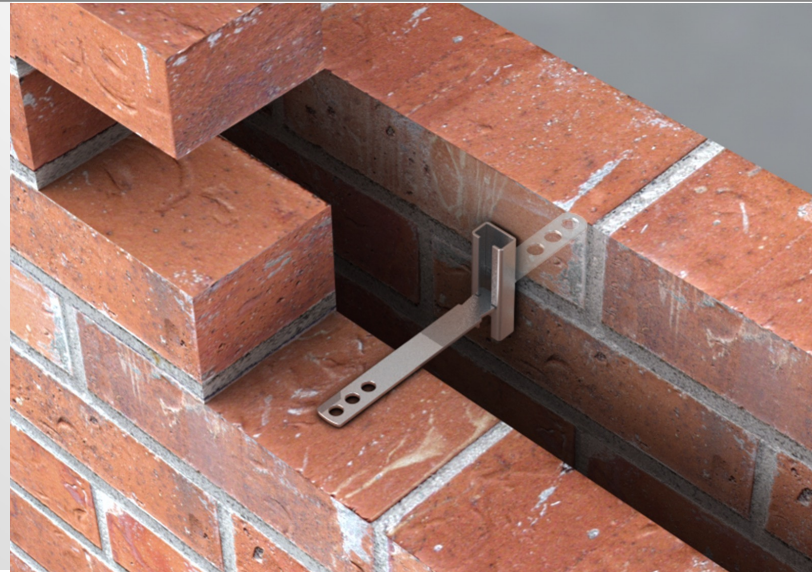

## Product

### V60T 28/15 Tanged Back Channel

28/15 tanged back channel for casting into concrete or building into brick/blockwork. Polystyrene infill available up request.

Used in conjunction with VS8 or VS8D ties to restrain brickwork.

Material grade 304 18/8 austenitic stainless steel to and applicable test results BS EN 10088-2.1.4301. Channel will provide a safe working tensile and shear loads of up to 1KN. Maximum safe working loads of V60T will be subject to suitable fixings/fixing centres and the substrate quality – the pull out strength on the channel is the equivalent of a type 1 wall tie.

#### Sizes

100mm

150mm

#### Units

100

100

#### Per

Box

Box

#### Safety Precautions

V60T Tanged Back Channel is manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.