
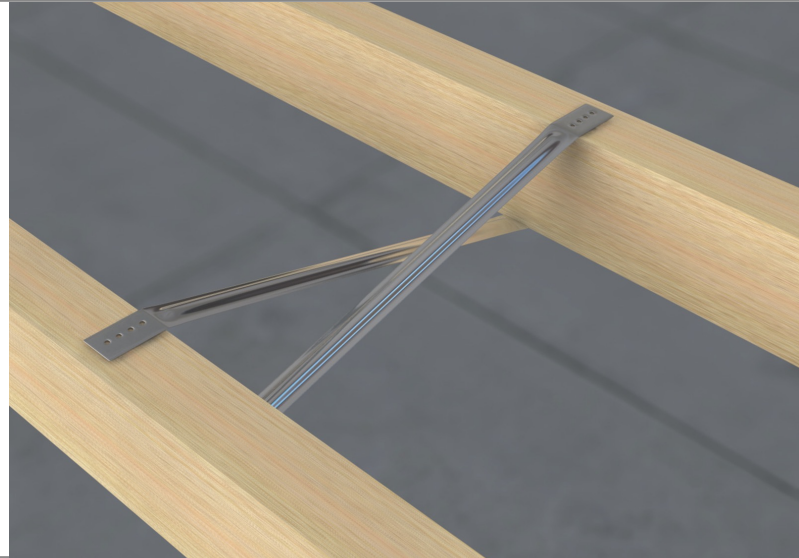


HJS Herringbone Joist Strut

Data sheet

Issue Date:
May 2026

The HJS a superior alternative to timber strutting, Herringbone Struts offer a cost effective method of providing necessary lateral support to floor joists as required by the Building Regulations. Fix to the top and underside of joists using the pre-punched holes. Position at the centre of the span where joists exceed 2.5m long, or in two rows spaced at one third and two thirds of overall span where joist exceeds 4.5metres. Manufactured from 0.9mm thick galvanised steel to suit joist centre spacing of 400, 450 and 600mm.

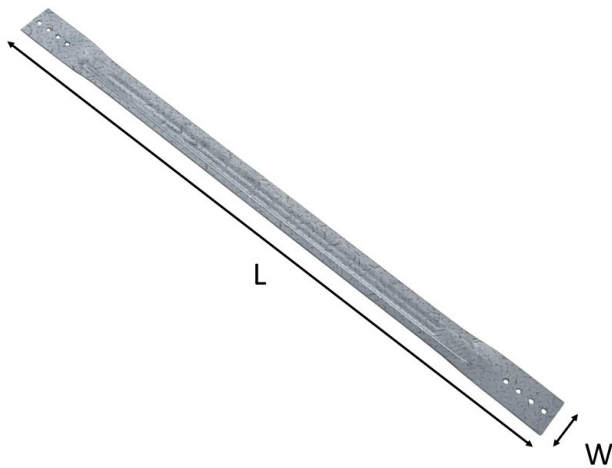

Product

Features:

- Easy to install
- Suits 400, 450 and 600mm centre

Fixings:

- By Building Designer

Packaging:

- Box Quantities see table

Product Details			
Product code	Dimensions (mm)		Box Quantity
	W	L	
HJS/400	32	480	100
HJS/450	32	530	100
HJS/600	32	660	100

