


# TLPAB23VARIABLE PVC-u Corner Bead With Variable Angle

Data sheet

Issue Date:  
June 2026

## PVC-u Beads

PVC-u beads are now being used more and more, particularly in areas of high rainfall or extreme damp conditions. They provide an economical alternative to stainless steel products and are used in the same way as normal galvanised or stainless steel beads. They are manufactured from white high density polyvinylchloride high impact window grade material. Other colours are available and manufactured to order. The face of the bead is ribbed and perforated to produce a good plaster or mortar key and can be easily cut to size using a hacksaw.

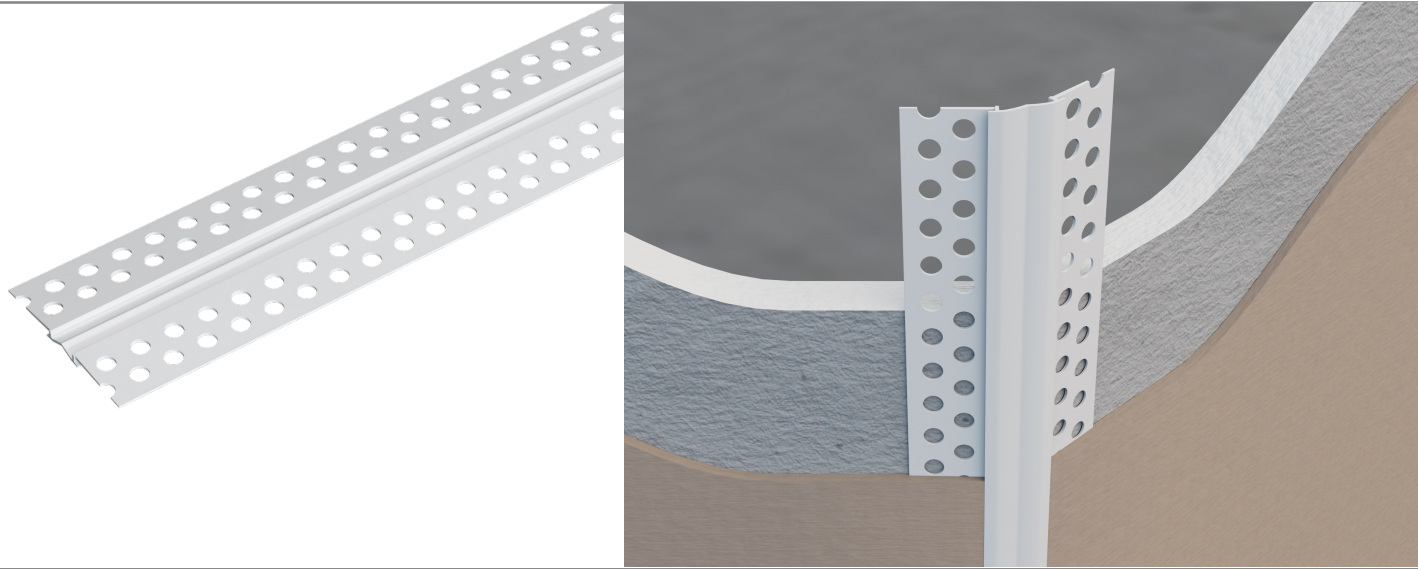

## TLPAB23VARIABLE PVC-u Corner Bead With Variable Angle

A PVC-u flexible angle bead for joining of 2 areas at a variable angle in drywall construction, suitable for up to 3mm plaster thickness, minimises the time required to form perfect unusual angles, no risk of corrosion. Internal use only.

### Benefits

- Simple installation (with plaster dabs or appropriate fixings)
- Cost effective
- Easy to cut (by use of tin snips or fine tooth saw)
- Non corrosive

**Standard:** Meets the equivalent standards required for metal bead to BS EN 13658-2:2005

**Material:** Exterior grade impact resistant UV stable unplasticized PVC-u

Code	Size	Per Box	Weight
TLPAB23Variable	3 x 25mm x 25m roll	1 roll	2kgs

Goods to be stored and transported laying down and in dry conditions.

Please dispose or recycle in accordance with waste management regulations.

### COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.



A Vista Group Company



A Vista Group Company



A Vista Group Company



A Vista Group Company



Scotland

A Vista Group Company