


PVC-u Beads

PVC-u beads are now being used more and more, particularly in areas of high rainfall or extreme damp conditions. They provide an economical alternative to stainless steel products and are used in the same way as normal galvanised or stainless steel beads. They are manufactured from white high density polyvinylchloride high impact window grade material. Other colours are available and manufactured to order. The face of the bead is ribbed and perforated to produce a good plaster or mortar key and can be easily cut to size using a hacksaw.

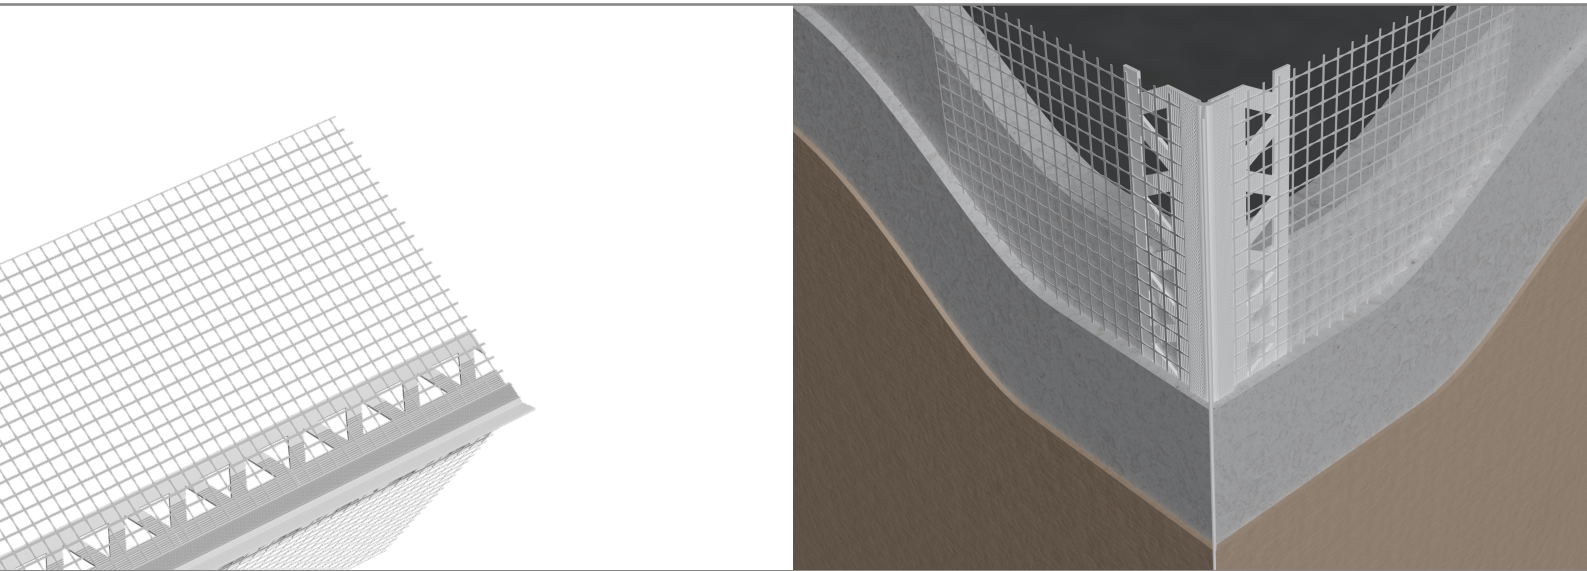

TLPMWABNOSED PVC-u Meshed Wing Nosed Angle Bead

A PVC render meshed wing corner bead used for thin-coat render systems on 90degree angles. The meshed wing integrate the bead into the render system for strength and durability and the nosed point is typically used as a depth guide but also offers extra impact resistance.

Benefits

- Simple installation (with plaster dabs or appropriate fixings)
- Cost effective
- Easy to cut (by use of tin snips or fine tooth saw)
- Non corrosive

Standard: Meets the equivalent standards required for metal bead to BS EN 13658-2:2005

Material: Exterior grade impact resistant UV stable unplasticized PVC-u

Code	Size	Per Box	Weight
TLPMWAB03254NOSED	2.5m x 3mm x 100mm	25 lengths	10.6kgs
TLPMWAB0625NOSED	2.5m x 6mm x 100mm	25 lengths	13.5kgs

Goods to be stored and transported laying down and in dry conditions.

Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.