
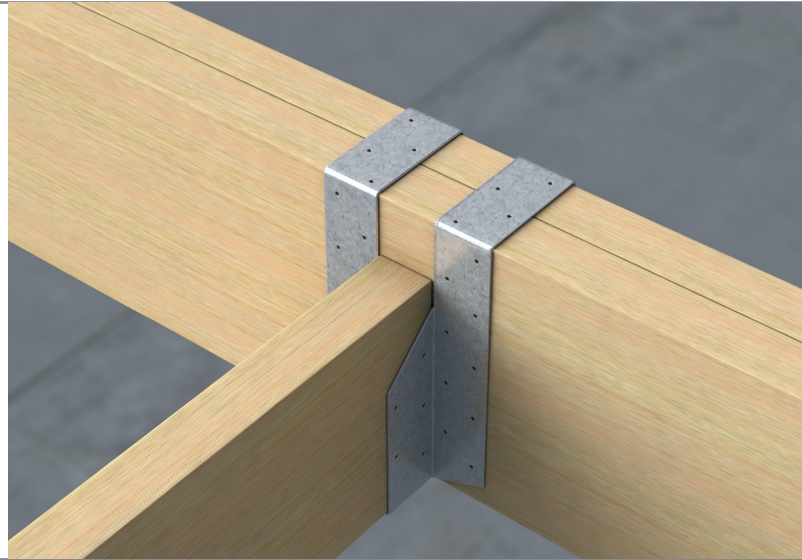


B610 Medium Duty Hanger (Long Leg)

Data sheet

Issue Date:
May 2026

The B610 is a 1.5mm thick galvanised medium duty joist hanger with 50mm wide legs, suitable for solid joist or I-Beam applications, either face fixed or wrapped over supporting joists. For loft conversion applications where the hanger extends below the supporting beam, a maximum drop of 75mm is recommended. Design features a location tab on the hanger base, designed to allow quick and accurate alignment of the hanger. Produced from galvanised steel to BS EN 10346 DX51D + G275 as standard, or stainless steel available to order. Galvanised hangers must be fixed using 30mm x 3.75mm sherardised square twisted nails in all pre-punched holes.

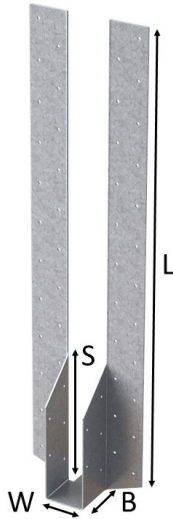

Product

Features:

- Quick and easy to install
- Thin profile No notching required
- Can be dropped by a maximum of **75mm**

Fixings:

- 3.75 x 30mm sherardised square twist nail


Approvals:

- CE Marked
- UKCA Marked

Packaging:

- Box Quantities of 10

Load Directions



Product Details									
Product code	Dimensions (mm)				Holes no. 4.0 Ø (mm)			Characteristic Capacity (kN)	
	W	L	B	S	Legs	Side Flange	Bearing	C16, C24 or TR26 Timber	
								F _{up}	F _{down}
B610/38	38	608	50	184	46	10	2	3.7	17.0
B610/44	44	605		181				4.1	17.0
B610/47	47	604		180				4.1	20.0
B610/50	50	602		178				4.1	20.0
B610/63	63	596		172				4.1	20.0
B610/75	75	608		184				4.1	20.0
B610/88	88	602		176				4.1	20.0
B610/91	91	600		174				4.1	20.0
B610/100	100	596		172				4.1	20.0
B610/125	125	608		184				4.1	20.0
B610/150	150	596		172				4.1	20.0

Note: Refer to fixing data sheet for fixing information.

