
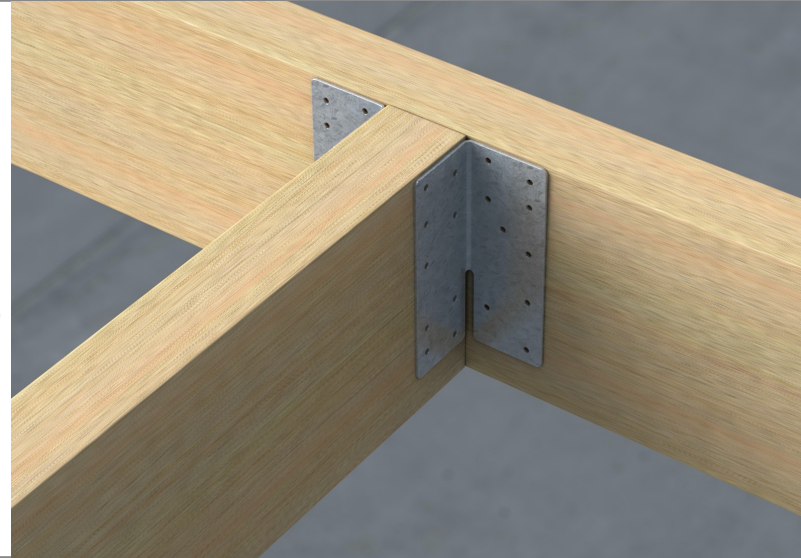


FA3 Framing Anchor

Data sheet

Issue Date:
May 2026

The FA3 is Multipurpose fixing that can be used for connecting roof timbers, joist trimmings, studding and general timber frame construction. Slotted design allows bending on site to suit all configurations. Manufactured from 1.2mm thick galvanised steel.

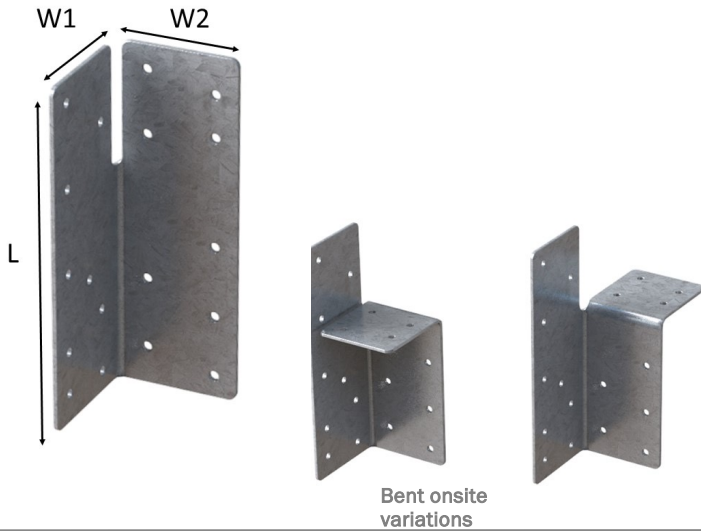

Product

Features:

- Easy to install
- Can be bent onsite

Fixings:

- Type A, 30 x 3.75mm Sherardised Square Twist Nails
- Type B, 35 x 3.75mm.


Approvals:

- CE Marked
- UKCA Marked

Packaging:

- Box Quantities 200

Load Directions

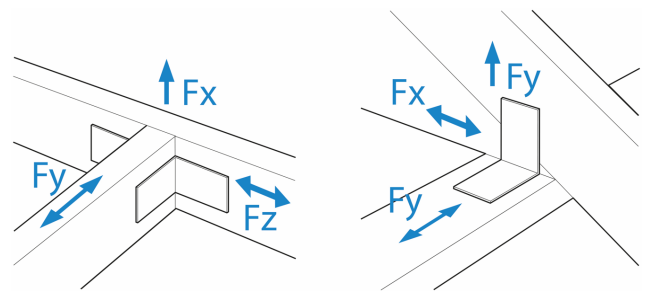

Product Details

Product code	Dimensions (mm)					Holes no. 4.0 Ø (mm)	Nails	Characteristic Capacity (kN)								
								C16 Timber			C24 Timber			TR26 Timber		
	W	W2	L	Plate 1	Plate 2			$F_{x,k}$	$F_{y,k}$	$F_{z,k}$	$F_{x,k}$	$F_{y,k}$	$F_{z,k}$	$F_{x,k}$	$F_{y,k}$	$F_{z,k}$
FA3	42	42	125	9	9	Type A	4.05	2.16	3.11	4.57	2.32	3.41	4.83	2.40	3.52	
						Type B	4.93	2.63	3.35	5.56	2.86	3.68	5.88	3.75	4.20	

Note: Refer to fixing data sheet for fixing information.

